




WALK DOORS

Series 5100

- 16 ga steel 3 1/2" jamb
- 24 ga galvanized skin
- Aluminum edges
- Parting stop
- Bulb kerf style weatherseal
- 3-wand sweep
- R Value 12
- Polyurethane foam filled
- Stainless steel 4x4 1/2" hinges
- 4-way Universal swing
- Lock bore, deadbolt prep, closer prep
- Panic hardware prep (note on order)
- Door lites are tempered & field reglazeable

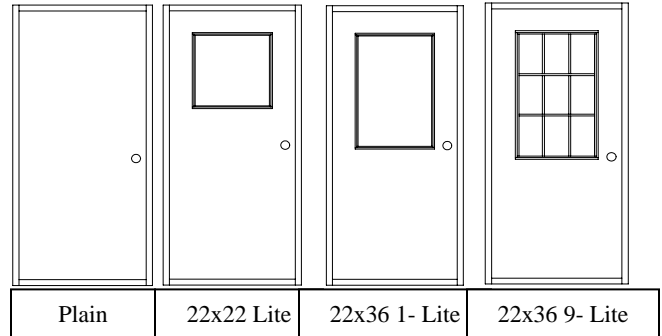

Applications


- Interior or exterior walls
- Non-insulated buildings
- Higher traffic areas

Series 7100 – Thermal Version of 5100

- Same product features
- Thermally broken panel & frame
- Pultruded fiberglass stiles & rails

Applications

- Buildings with finished interior
- Insulated buildings
- Heated or air cooled areas
- High traffic areas

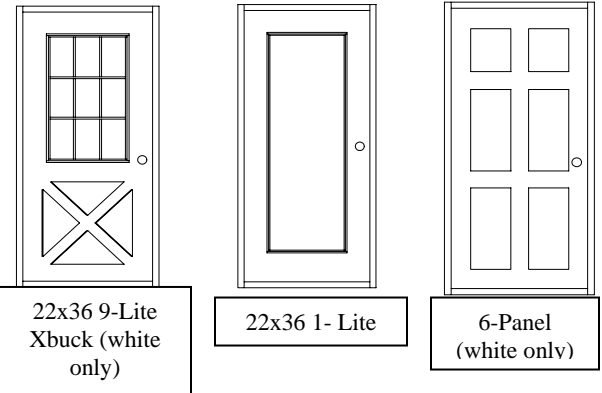

Nominal Sizes

3/0 x 6/8 – White, Clay, Bronze, Brown

3/6 x 6/8 – White only

4/0 x 6/8 – White, Clay, Bronze, Brown

6/0 x 6/8 – White, Clay, Bronze, Brown

Custom color painting available

Installation tips

- Long wand of the sweep must be to the exterior side
- Plumb & square jamb is critical to performance
- Vertical weatherseal must be mounted firmly against sill
- Header snap-in parting stop goes in last after handing is decided
- Install with EZ Fit Trim Kit for finished appearance & no fasteners showing